

## Valvola di ritegno Fem/Fem. DIN 11851

Threaded Check valve

Rückschlagventil G/G

Clapet anti-rétour nez fil./nez fil. DIN

Válvula de retencion M/M

art. 46L

AISI 304 - 316


ART.	DN	A	B	C	D
46 L - 1	25	52x1/6"	26	64	87
46 L - 2	32	58x1/6"	32	66	93
46 L - 3	40	65x1/6"	38	72	98
46 L - 4	50	78x1/6"	50	72	111
46 L - 5	65	95x1/6"	66	80	128
46 L - 6	80	110x1/4"	81	100	143
46 L - 7	100	130x1/4"	100	104	164

### SPECIFICHE TECNICHE:

- Corpo in AISI 316 - AISI 304
- Tenuta in EPDM
- Pressione di apertura 0.2 bar
- Pressione max di esercizio 10 bar
- Temperatura di esercizio -50°C / +100°C

### TECHNICAL SPECIFICATIONS:

- Body in AISI 316 - AISI 304
- Seal in EPDM
- Opening pressure 0.2 bar
- Max working pressure 10 bar
- Working temperature -50°C / +100°C

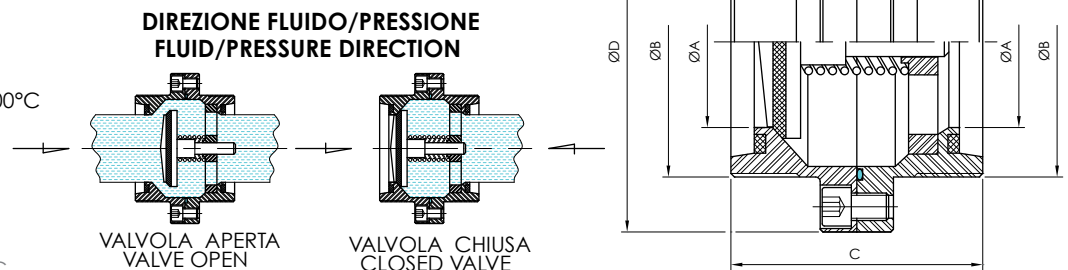

Ver. 04.18

## Valvola di ritegno con attacchi gas

Non return valve ISO threaded ends

Rückschlagventile IG GAS

Clapet anti retour fileté gaz

Válvula de retencion extremidades gas

art. 46U

AISI 304 - 316

DN	A	B
1/2"	80	35
3/4"	80	39
1"	85	44
1 1/4"	87	55
1 1/2"	95	55
2"	105	75
2 1/2"	125	90

### SPECIFICHE TECNICHE:

- Corpo e testa in AISI 316
- Tenuta in PTFE
- Pressione di apertura 0.005 bar
- Pressione max di esercizio 40 bar
- Temperatura di esercizio -20°C / +150°C
- Filetti femmina Gas ISO 228-1

### TECHNICAL SPECIFICATIONS:

- Body and head in AISI 316
- Seal in PTFE
- Opening pressure 0.005 bar
- Max working pressure 40 bar
- Working temperature -20°C / +150°C
- Threads Female ISO 228-1

